


特点和用途 / Features & Applications

- 可选采样频率 100HZ 或者 5000HZ
 - 多种信号可输出 0~20mA、4~20mA、0~±10V、0~±5V
 - 零点、满度可调整
 - 2 路独立通道
- ❖ The frequency can be 100HZ or 5000HZ.
- ❖ Multi-output 0~20mA, 4~20mA, 0~±10v, 0~±5V.
- ❖ Zero or full scale can be adjusted.
- ❖ 2 independent channels.

技术参数 / Technical Parameters

供电电压 Supply voltage	DC18~30V
信号输入范围 Signal input range	0.4~6mV
激励电压 Excitation voltage	5VDC±2%,100mA
输出信号 Output	0~±5V/0~±10V, 0~20mA/ 4~20mA(同时带)
精度 Accuracy	<0.05%FS
驱动能力 Number of load cells	Each channel drives 4pcs load cells 350 Ω. (每个通道驱动 4 个 350 欧传感器)
材质 Material	铝合金外壳
防护等级 Level of protection	IP64(航空插头), 防水接头 IP67 (可选)
工作温度 Temperature operating	-30~60℃
响应频率 Frequency response	100HZ/5KHZ (option 可选)
防护等级 Protection	IP64

外形尺寸 / Dimensions

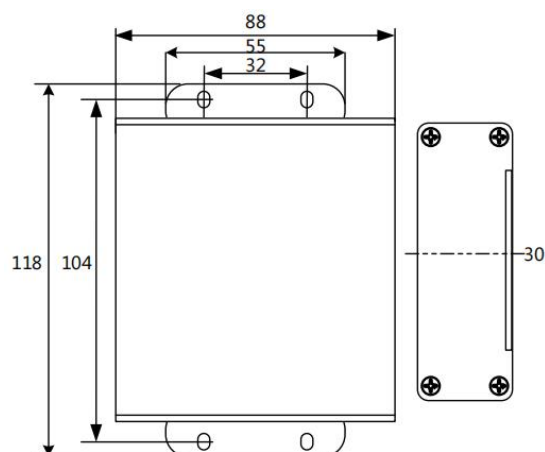

选型表 / Features & Applications

型号 Type	输出 Output
HY-FA02	100HZ
HY-FA02H	5000HZ